


WATER SUCTION HOSE 10 BAR

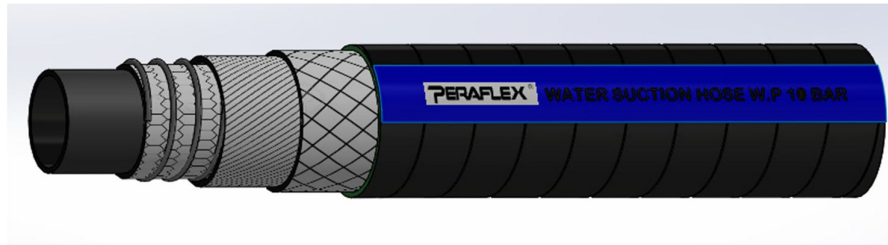

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
RWS-10-025	1"	25.4	35.0	10	30	0.718	30
RWS-10-032	1-1/4"	31.8	42.0	10	30	0.935	30
RWS-10-038	1-1/2"	38.1	48.0	10	30	1.058	30
RWS-10-050	2"	50.8	63.0	10	30	1.655	30
RWS-10-065	2-1/2"	63.5	77.0	10	30	2.234	30
RWS-10-075	3"	76.2	90.0	10	30	2.658	30
RWS-10-090	3-1/2"	88.9	104.0	10	30	2.716	30
RWS-10-100	4"	101.6	118.0	10	30	3.770	30
RWS-10-125	5"	127.0	144.0	10	30	5.708	30
RWS-10-150	6"	152.0	170.0	10	30	7.133	30
RWS-10-200	8"	203.2	223.0	10	30	10.702	12
RWS-10-250	10"	254.0	277.0	10	30	15.104	12
RWS-10-300	12"	304.0	328.0	10	30	21.007	12
RWS-10-350	14"	355.6	380.0	10	30	23.600	12
RWS-10-400	16"	406.0	444.0	10	30	37.341	12

APPLICATION

Hardwall hose for suction of water and non-corrosive fluids. Suitable for agricultural, industrial and other applications.

CONSTRUCTION

Tube: Black color of NR blend compound.

Cover: Black color of NR blend compound. Abrasion and weather resistance.

Reinforcement: Multiple layers of high tensile synthetic cord and supported with helix wire.

Temperature: -20°C to +80°C

Safety Factor: 3:1