




## PVC SPRING HOSE

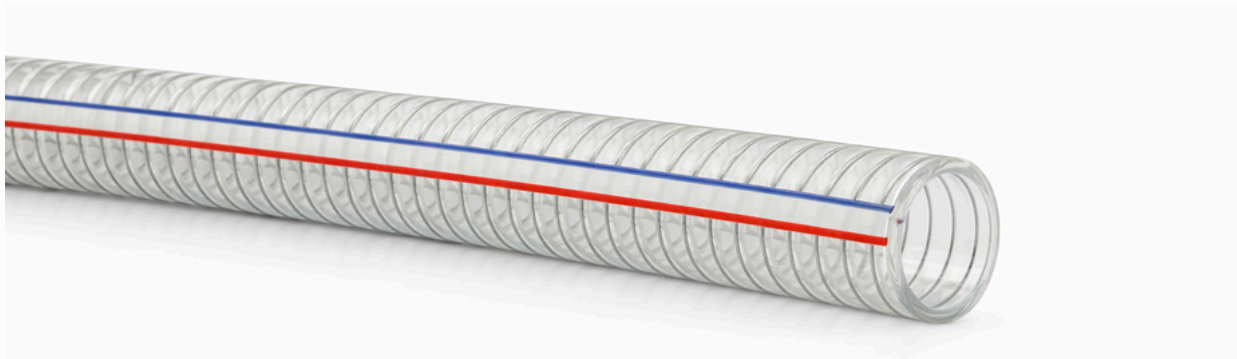

### SPECIFICATIONS

- Offers crystal-clear transparency with mirror-smooth inner surfaces, ensuring excellent visual flow monitoring.
- Features a small bending radius, odorless and non-toxic material, and lightweight construction for easy handling.
- Ideal for conveying water, oil, and powder across various industries such as manufacturing, agriculture, engineering, food processing, and sanitary systems.
- Suitable for use within a temperature range of -5°C to +65°C.

### CONSTRUCTION

The Toyogoma hose is constructed using a durable PVC tube as its inner layer, designed to deliver excellent flow visibility and chemical resistance. It is reinforced with high-tensile steel wire, providing the hose with enhanced strength, flexibility, and resistance to pressure and vacuum conditions. The outer cover is available in transparent green, offering aesthetic appeal and allowing easy visual inspection of the contents during operation.



## PVC SPRING HOSE

INCH	ID (MM)	OD (MM)	Working Pressure (Bar)	Length per roll (m)	Weight kg/roll
1/4	6	12	8	100	12
3/8	9	15	6	100	17
1/2	12	17	6	100	18
5/8	16	20	5	100	17
3/4	19	25	5	50	15
1	25	31.5	4	50	25
1-1/4	32	39	4	40	28
1-1/2	38	46	4	40	40
1-3/4	45	56	4	40	42
2	51	62	4	40	50
2-1/2	63	80	3	30	63
3	76	89	3	20	72
3-1/2	90	108	3	20	92
4	102	118	3	20	100
5	127	143	3	20	126
6	152	170	3	10	75
8	200	222	3	10	120
10	254	286	2	10	170
12	305	335	2	10	200