


ANTISTATIC OIL HOSE 20 BAR

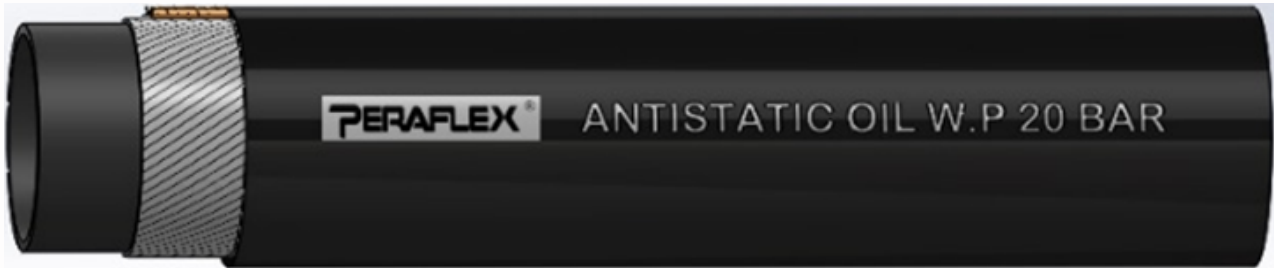

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
RAS-006	1/4"	6.3	15	20	60	0.233	100
RAS-008	5/16"	8	16	20	60	0.244	100
RAS-010	3/8"	9.5	18	20	60	0.299	100
RAS-013	1/2"	12.7	23	20	60	0.465	100
RAS-016	5/8"	16	26	20	60	0.531	100
RAS-019	3/4"	19	30	20	60	0.687	100
RAS-022	7/8"	22	33	20	60	0.773	100
RAS-025	1"	25.4	37	20	60	0.931	100

APPLICATION:
SUITABLE FOR THE TRANSFER OF OIL AND PETROLEUM BASED PRODUCTS.

CONSTRUCTION:
TUBE: BLACK COLOR OF NBR BLEND COMPOUND. OIL RESISTANCE.
COVER: BLACK COLOR OF NBR/PVC BLEND COMPOUND. ABRASION AND WEATHER RESISTANCE.
REINFORCEMENT: HIGH TENSILE SYNTHETIC YARN INCORPORATED WITH COPPER WIRE.
TEMPERATURE: -20°C TO +70°C
SAFETY FACTOR: 3:1