


PUSH ON AIR HOSE 10 BAR

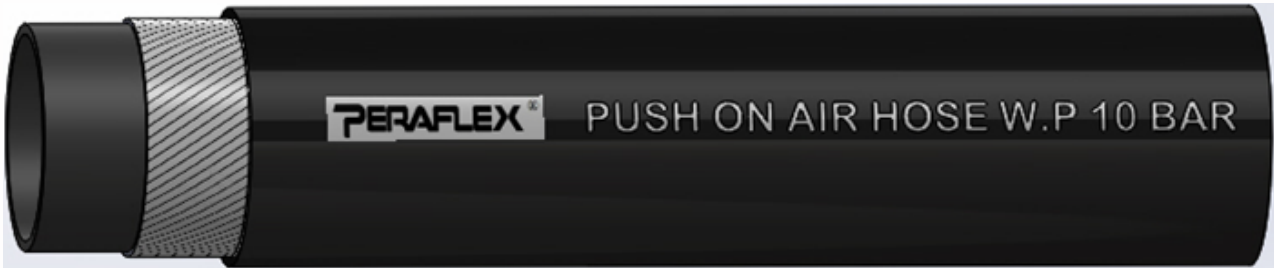

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
RPA-10-006	1/4"	6.4	12.7	10	30	0.154	100
RPA-10-008	5/16"	8	14.3	10	30	0.181	100
RPA-10-010	3/8"	9.5	15.8	10	30	0.206	100
RPA-10-013	1/2"	12.7	19.6	10	30	0.286	100
RPA-10-016	5/8"	16	23.6	10	30	0.385	100
RPA-10-019	3/4"	19	28.3	10	30	0.562	100
RPA-10-025	1"	25.4	33.9	10	30	0.646	100

APPLICATION:
SOFTWALL HOSE ARE SPECIALLY USE WITH NO CRIMP. IT ALLOWS PUSH ON FITTINGS TO BE INSERTED INTO PLACE EASILY AND QUICKLY.

CONSTRUCTION:
TUBE: BLACK COLOR OF EPDM BLEND COMPOUND.
COVER: BLACK COLOR OF EPDM BLEND COMPOUND. ABRASION AND WEATHER RESISTANT. OIL MIST RESISTANCE.
REINFORCEMENT: HIGH TENSILE SYNTHETIC YARN.
TEMPERATURE: -40°C TO +100°C
SAFETY FACTOR: 3:1