


OIL DISCHARGE HOSE 15 BAR



Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
ROD-15-013	1/2"	12.7	21	15	45	0.263	30
ROD-15-019	3/4"	19	29	15	45	0.476	30
ROD-15-022	7/8"	22.2	32	15	45	0.524	30
ROD-15-025	1"	25.4	36	15	45	0.624	30
ROD-15-028	1-1/8"	28.6	39	15	45	0.671	30
ROD-15-032	1-1/4"	31.8	42.5	15	45	0.764	30
ROD-15-035	1-3/8"	35	46	15	45	0.698	30
ROD-15-038	1-1/2"	38.1	49	15	45	0.739	30
ROD-15-041	1-5/8"	41.3	53	15	45	0.899	30
ROD-15-045	1-3/4"	44.5	56	15	45	0.932	30
ROD-15-048	1-7/8"	47.8	60	15	45	1.095	30
ROD-15-050	2"	50.8	64	15	45	1.245	30
ROD-15-054	2-1/8"	54	67	15	45	1.218	30
ROD-15-057	2-1/4"	57	70	15	45	1.279	30
ROD-15-060	2-3/8"	60.5	74	15	45	1.407	30
ROD-15-065	2-1/2"	63.5	77	15	45	1.47	30
ROD-15-066	2-5/8"	66	79	15	45	1.424	30

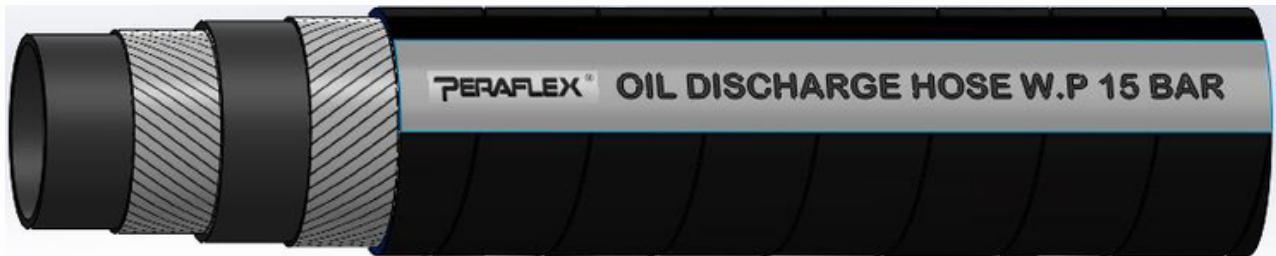

OIL DISCHARGE HOSE 15 BAR

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
ROD-15-070	2-3/4	70	83	15	45	1.503	30
ROD-15-073	2-7/8"	73.3	87	15	45	1.636	30
ROD-15-075	3"	76.2	90	15	45	1.718	30
ROD-15-089	3-1/2"	88.9	103	15	45	1.91	30
ROD-15-100	4"	101.6	116	15	45	2.252	30
ROD-15-125	5"	127	142	15	45	2.785	30
ROD-15-150	6"	152	167	15	45	3.06	30
ROD-15-200	8"	203.2	222	15	45	5.025	12
ROD-15-250	10"	254	274	15	45	6.782	12
ROD-15-300	12"	304	328	15	45	8.717	12

APPLICATION:
SOFTWALL HOSE USED FOR TRANSFER OF OIL AND PETROLEUM BASED PRODUCTS.

CONSTRUCTION:
TUBE: BLACK COLOR OF NBR BLEND COMPOUND. OIL RESISTANCE.
COVER: BLACK COLOR OF NBR BLEND COMPOUND. OIL, ABRASION AND WEATHER RESISTANCE.
REINFORCEMENT: MULTIPLE LAYERS OF HIGH TENSILE SYNTHETIC CORD.
TEMPERATURE: -20°C TO +90°C
SAFETY FACTOR: 3:1