


## BLACK AIR HOSE 20 BAR

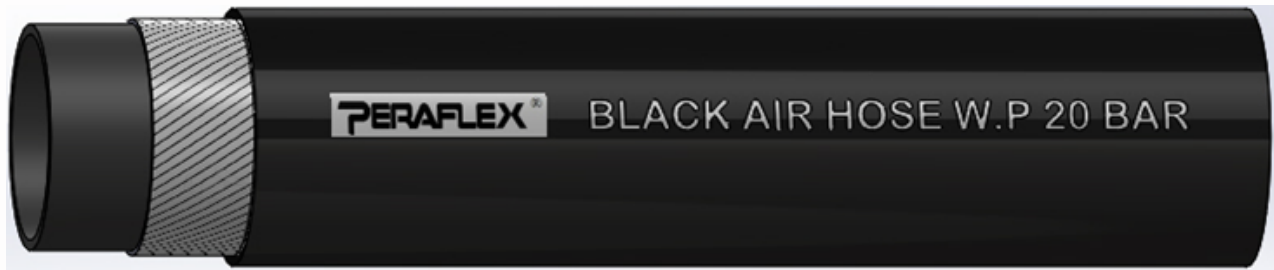

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
RAH-20-006	1/4"	6.4	13	20	60	0.184	100
RAH-20-008	5/16"	7.9	15	20	60	0.235	100
RAH-20-010	3/8"	9.5	17	20	60	0.288	100
RAH-20-013	1/2"	12.7	21	20	60	0.402	100
RAH-20-016	5/8"	15.9	25	20	60	0.533	100
RAH-20-019	3/4"	19	28	20	60	0.615	100
RAH-20-025	1"	25.4	35	20	60	0.849	100
RAHM-20-032	1-1/4"	31.8	46	20	60	1.209	30
RAHM-20-038	1-1/2"	38.1	52	20	60	1.365	30
RAHM-20-050	2"	50.8	65	20	60	1.707	30
RAHM-20-065	2-1/2"	63.5	80	20	60	2.213	30
RAHM-20-075	3"	76.2	94	20	60	2.793	30
RAHM-20-100	4"	101.6	120	20	60	3.642	30

**APPLICATION:**  
HEAVY DUTY AIR HOSE SUITABLE FOR TRANSFERRING AIR AND WATER IN MINING, SHIPYARD, CIVIL AND BUILDING INDUSTRIES.

**CONSTRUCTION:**  
**TUBE:** BLACK COLOR OF SBR COMPOUND.  
**COVER:** BLACK COLOR OF SBR BLEND COMPOUND. ABRASION AND WEATHER RESISTANCE.  
**REINFORCEMENT:** HIGH TENSILE SYNTHETIC YARN.  
**TEMPERATURE:** -20°C TO +85°C  
**SAFETY FACTOR:** 3:1

\*RAH: EXTRUSION  
 \*RAHM: MANDREL BUILD