


FUEL HOSE INCHES SIZE 10 BAR

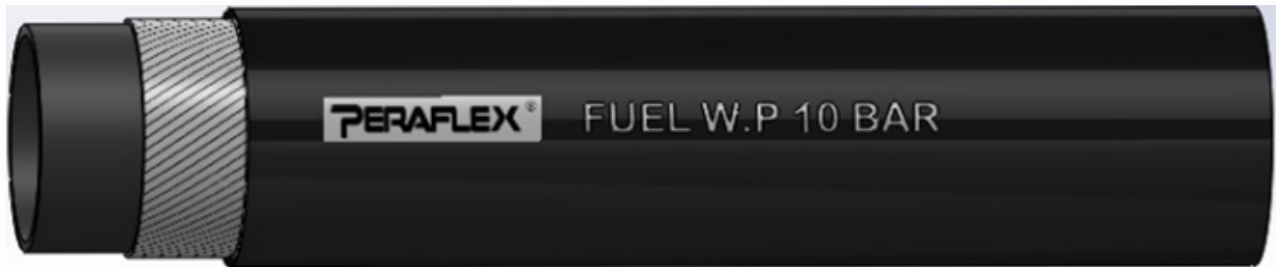

Code	Nominal inch	I.D (mm)	O.D (mm)	Pressure (bar)		Weight (Kg/m)	Length (m)
				Working	Burst		
RFD-10-006	1/4"	6.4	13	10	30	0.165	100
RFD-10-008	5/16"	7.9	15	10	30	0.211	100
RFD-10-010	3/8"	9.5	17	10	30	0.257	100
RFD-10-013	1/2"	12.7	21	10	30	0.36	100
RFD-10-016	5/8"	15.9	25	10	30	0.477	100
RFD-10-019	3/4"	19	29	10	30	0.617	100
RFD-10-022	7/8"	22.2	32	10	30	0.685	100
RFD-10-025	1"	25.4	35	10	30	0.746	100

APPLICATION:
SOFTWALL HOSE USED IN FUEL LINE SYSTEMS FOR THE TRANSFER OF PETROLEUM PRODUCTS UNDER LOW PRESSURE.

CONSTRUCTION:
TUBE: BLACK COLOR OF NBR COMPOUND. GASOLINE AND DIESEL RESISTANCE.
COVER: BLACK COLOR OF NBR COMPOUND. FUEL, ABRASION AND WEATHER RESISTANCE.
REINFORCEMENT: HIGH TENSILE SYNTHETIC YARN.
TEMPERATURE: -20°C TO +80°C
SAFETY FACTOR: 3:1